


REVERSIBLE GEARED MILLING DRILLING MACHINE, WITH AUTOMATIC DOWN FEED, COOLANT SYSTEM AND REVERSE ROTATION.

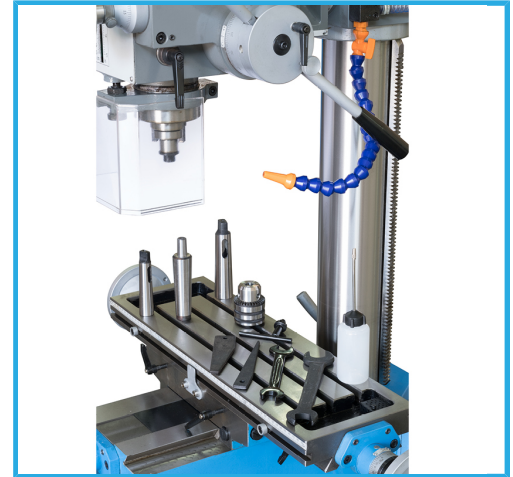

Max drilling capacity on cast iron with pre-drilling hole	Ø 40 mm
Max drilling capacity on steel with pre-drilling hole(s235jr)	Ø 32 mm
Face milling cutter max	Ø 80 mm
End milling cutter max	Ø 25 mm
Tapping capacity	Ø 22 mm
Spindle taper	CM 4
Spindle speed	(12) 75 - 3200 rpm
Spindle travel	130 mm
Spindle rotation	Dx - Sx
Quill	Ø 76 mm
Column	Ø 115 mm
Head tilt left and right	± 60°
Manual vertical feed division	0.02 mm
Feed range	(3) 0,1 - 0,18 - 0,26 mm/rev
Distance between spindle nose and table	715 mm
Distance spindle axis - column surface	260 mm
Table dimensions	585 x 190 mm
Table slots	12 mm
Longitudinal travel	360 mm
Cross travel	250 mm
Longitudinal axis	360 mm
Cross axis	250 mm
Base dimensions	648 x 412 mm

Included

- Self-locking chuck 1 - 16 B16
- Drill chuck shank MT 4 B16
- Spindle taper shank MT 4 Ø 27 mm
- Reduction sleeve MT 4/3
- Reduction sleeve MT 3/2
- Oilers
- Tie rod M16
- Service keys

Base slot	14 mm
Motor	400 V 50 Hz 1,1 - 1,5 kW
Overall sizes	740 x 790 x 1960 h mm
Net weight	365 kg
Packaging dimensions	825x760x1885 h mm
Gross weight	380,00 kg
EAN Code	8012667295769