


**BENCH LATHE SEMI NORTON GEAR BOX AND BELT DRIVE,  
 LONGITUDINAL AND CROSS FEEDS, TURNING, LEADSCREW,  
 PARTIALLY ASSEMBLED BENCH...**

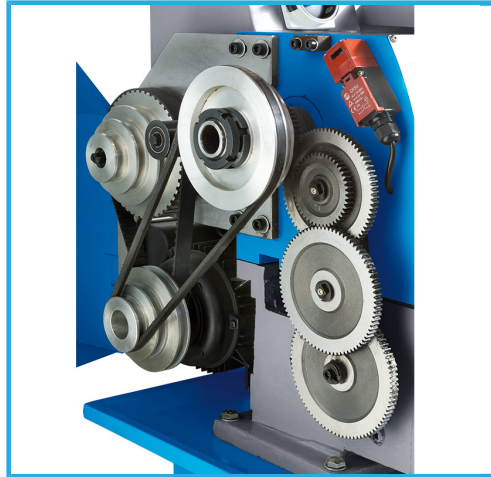

<b>Centers height</b>	160 mm
<b>Max swing over the bed</b>	320 mm
<b>Max swing over the cross slide</b>	210 mm
<b>Tool height</b>	16 mm
<b>Max length of workpiece</b>	900 mm
<b>Spindle bore</b>	38 mm
<b>Spindle nose Camlock</b>	Camlock D1-4
<b>Spindle bore taper MT</b>	5
<b>Variable spindle speed</b>	75 - 500   300 - 2000 rpm
<b>Longitudinal feeds</b>	0,07 - 1,0 mm/rev
<b>Cross feeds</b>	0,0017 - 0,25 mm/rev
<b>Metric threads</b>	(18) 0,2 - 3,5 mm
<b>Inch threads</b>	(21) 8 - 56 TPI
<b>Tailstock taper MT</b>	3
<b>Motor</b>	230V 50/60 Hz 1.5 kW
<b>Dimensions</b>	1600 x 750 x 1300 mm
<b>Net weight</b>	360 kg
<b>Packaging dimensions</b>	400x320x820 h mm   400x270x820 h mm   1650x750x690 h mm
<b>Gross weight</b>	368,00 kg
<b>EAN Code</b>	8012667312251

**Included**

- 3+3 jaw self centering chuck Ø 160 mm
- 4 Reversible independent jaws chuck Ø 160 mm
- Face plate Ø 240 mm
- Flange for 4-jaw chuck Ø 160 mm
- Follow rest
- Steady rest
- Dead center MT 3
- Dead center MT 5
- Clutch on turning bar
- Thread dial
- Leadscrew hood
- Turret safeguard with micro switch
- Chuck safeguard with micro switch
- Full length splash guard
- Quick change tool post T0AE
- LED light
- Quick locking tailstock carriage 75 mm
- Wagon gears in oil bath