


3-AXIS DISPLAY WITH SPEED VARIATION CONTROL, SEMI NORTON GEARBOX. WITH CAST IRON MONOBLOC BASE. THE COMPUTER-VIEWER VARIES THE...



FERVIplus

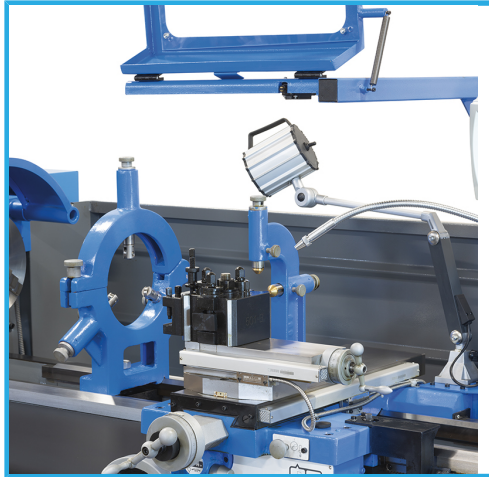

Centers height	230 mm
Max swing over the bed	460 mm
Max swing over the cross slide	270 mm
Max swing over the gap	690 mm
Tool height	25 mm
Max length of workpiece	1500 mm
Spindle bore	58 mm
Spindle nose Camlock	Camlock D1-6
Spindle bore taper MT	6
Variable spindle speed	(2) 30 - 600 600 - 2000 rpm
Longitudinal feeds	0,014 - 0,784 mm/rev
Cross feeds	0,031 - 1,7 mm/rev
Metric threads	0,1 - 14 mm
Inch threads	2 - 112 TPI
Tailstock taper MT	4
Motor	400V 50/60 Hz 5,5 kW
Cooling pump	400V 50 Hz 90 W
Dimensions	2750 x 1080 x 1650 h mm
Net weight	1970 kg
Packaging dimensions	2840 x 1150 x 1430 mm
Gross weight	2226,00 kg
EAN Code	8012667340315

Included

- 3+3 jaw self centering chuck Ø 250 mm
- 4 independent jaw chuck Ø 250 mm
- Reduction sleeve MT 6/4
- Face plate Ø 350 mm
- Follow rest
- Steady rest
- 2 x Dead center MT 4
- Live center MT 4
- Thread dial
- Leadscrew hood
- Chuck safeguard
- Full length splash guard
- Electro-mechanic foot brake
- Quick change tool post type B
- Working lamp LED
- Cooling system
- Turret guard
- Quick locking tailstock carriage
- Wagon gears in oil bath