
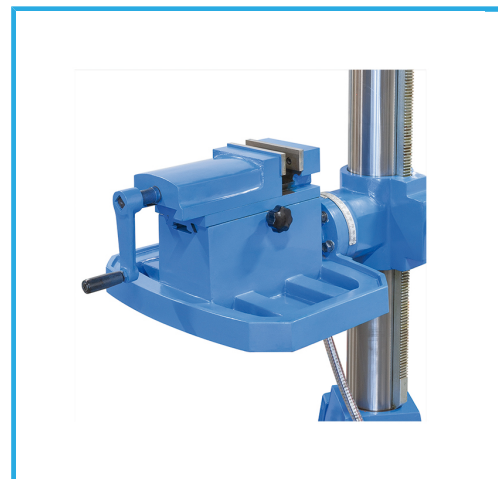


REVERSIBLE, WITH AUTOMATIC FEEDING, COOLANT SYSTEM,
REVERSIBLE TABLE WITH 140MM VICE.

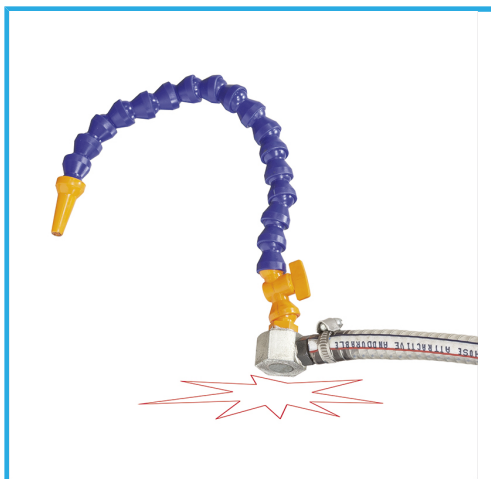

Max drilling capacity on cast iron with pre-drilling hole	Ø 38 mm
Max drilling capacity on steel with pre-drilling hole(s235jr)	Ø 32 mm
Continuous drilling capacity	Ø 28 mm
Spindle taper	MT 4
Chuck sizes	1 - 13 B16
Spindle speed	100 - 2200 rpm
Spindle travel	130 mm
Quill	75 mm
Column	123 mm
Manual vertical feed division	0,05 mm
Feed range	(3) 0,05 - 0,1 - 0,2 mm/rev
Distance between spindle nose and table	300 mm
Distance between spindle nose and base	1220 mm
Table dimensions	500 x 380 mm
Slot	14 mm
Tilting table	±90°
Vice	125 mm
Base dimensions	460 x 670 mm
Motor	400 V 50 Hz 1,1/1,9 kW
Cooling pump	400 V 50 Hz 75 W
Dimensions	700 x 1100 x 1900 mm
Net weight	385 kg
Packaging dimensions	1150 x 620 x 2050 h mm

Included

Drill chuck with key 1 - 13 mm B16
Drill chuck shank MT 4 B16
Morse taper reduction sleeve MT 4/3
Morse taper reduction sleeve MT 3/2

Gross weight

434,00 kg

EAN Code

8012667362157