
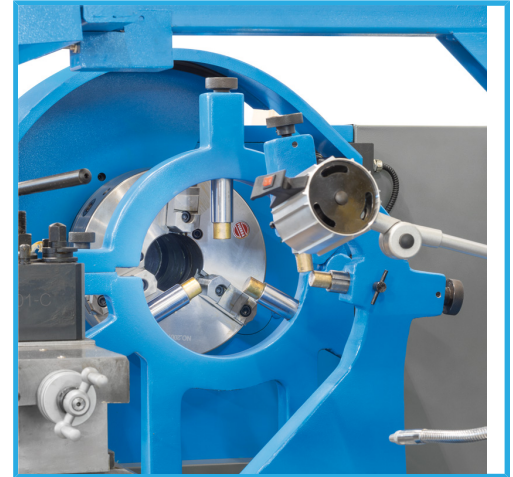


WITH MECHANICAL SPINDLE CLUTCH AND 3 AXIS READ OUT, SEMI NORTON GEAR BOX. EQUIPPED WITH A JOYSTICK FOR THE INSERTION OF RAPID...

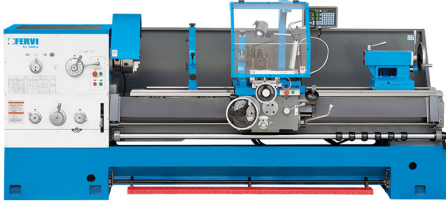

| | |
|---------------------------------------|-----------------------|
| Centers height | 330 mm |
| Max swing over the bed | 660 mm |
| Max swing over the cross slide | 420 mm |
| Max swing over the gap | 870 mm |
| Tool height | 32 mm |
| Distance between centers | 1000 mm |
| Spindle bore | 105 mm |
| Spindle nose Camlock | Camlock D1-8 |
| Spindle speed | (12) 36 - 1600 rpm |
| Longitudinal feeds | 0,063 - 2,52 mm/giro |
| Cross feeds | 0,027 - 1,07 mm/rev |
| Metric threads | (22) 1 - 14 mm |
| Inch threads | (26) 2 - 28 TPI |
| Tailstock taper MT | 5 |
| Motor | 400V 50 Hz 7,5 kW |
| Cooling pump | 400V 50 Hz 90 W |
| Dimensions | 2500 x 1400 x 1600 mm |
| Net weight | 3040 Kg |
| EAN Code | 8012667402051 |

Included

3 reversible jaw self centering chuck Ø 320 mm
 4 independent jaw chuck Ø 400 mm
 Face plate Ø 600 mm
 Follow rest
 Follow rest
 Live center MT 5
 Thread dial
 Leadscrew hood
 Tool post guard
 Chuck safeguard
 Full length splash guard
 Italy style quick change tool post type C
 Working LED lamp
 Cooling system
 Electromechanical foot brake
 Tailstock carriage a quick locking
 Wagon gears in oil bath
 Adjustable leveling feet