


VERTICAL MILLING, ISO 40, MOTORIZED VARIABLE ONE AXIS CROSS TABLE

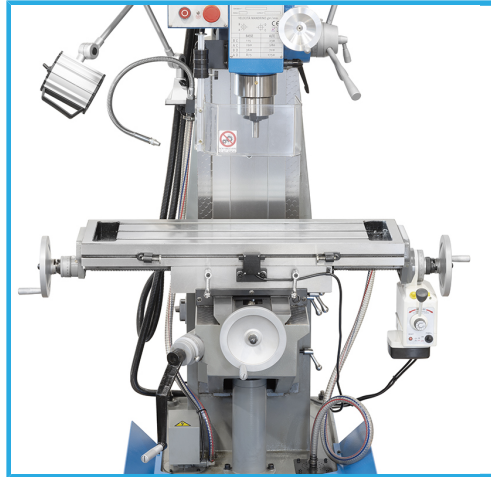

Face milling cutter max	100 mm
End milling cutter max	32 mm
Max drilling capacity on cast iron with pre-drilling hole	50 mm
Max drilling capacity on steel with pre-drilling hole(s235jr)	30 mm
Spindle nose Camlock	ISO40 DIN2080
Quill	90 mm
Spindle travel	120 mm
Vertical head rotation	± 45°
Head body rotation	± 180°
Variable spindle speed	(8) 115 - 1750 rpm
Motor	400 V 50 Hz 0,85 - 1,5 kW
Table movement motor	110V 50Hz 300W
Base dimensions	510 x 900 mm
Cooling pump	400 V 50 Hz 40W
Distance between spindle nose and table	45 - 395 mm
Distance spindle axis - column surface	215 - 450 mm
Table dimensions	800 x 240mm
Longitudinal axis	380 mm
Cross axis	220 mm
Slot	14 mm
Maximum capacity	400 Kg
Dimensions	1680 x 1500 x 2100 h mm
Net weight	1000 Kg

Included

- Base with chip tray
- Coolant system
- LED Lamp
- ISO40 ER32 8Pcs Collet Chuck Set
- Reduction Sleeve ISO40 MT3
- Key Type Drill Chuck 3-16mm/B18
- Drill Arbor ISO40 B18
- Draw Bar M16 ISO40 2 Pcs
- Variable speed motorized axis with rapid function
- Round table flyers with neutral function

Gross weight

450,00 kg

EAN Code

8012667406349

Packaging dimensions

1340x1130x h 2240 mm