


3 AXIS READ OUT AND SEMI NORTON GEAR BOX. TURNING BAR WITH ADJUSTABLE CLUTCH AND ROTATION SPEED DISPLAY.



FERVIplus

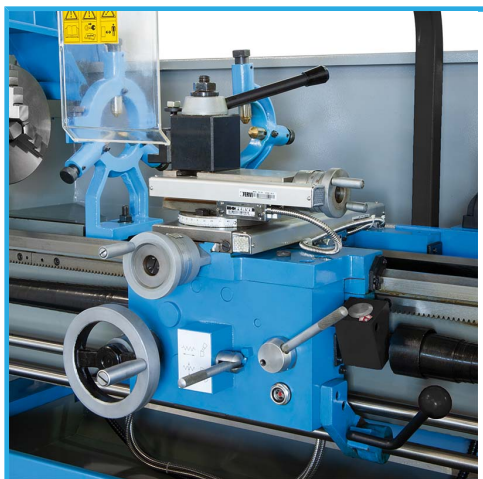

Centers height	160 mm
Max swing over the bed	340 mm
Max swing over the cross slide	180 mm
Tool height	16 mm
Max length of workpiece	940 mm
Spindle bore	38 mm
Spindle nose Camlock	Camlock D1-4
Spindle bore taper MT	5
Variable spindle speed	65- 1750 rpm
Longitudinal feeds	0,053 - 1,291 mm/rev
Cross feeds	0,011 - 0,276 mm/rev
Metric threads	0,4 - 7 mm
Inch threads	4 - 60 TPI
Tailstock taper MT	3
Motor	230 V 50/60 Hz 1.5 kW
Dimensions	1770 x 1400 x 670 mm
Net weight	530 kg
Packaging dimensions	1920 x 1620 x 780 mm
Gross weight	566,00 kg
EAN Code	8012667254346

Included

3+3 jaw self centering chuck Ø 160 mm
4 Reversible independent jaws chuck Ø 200 mm
Reduction sleeve MT 5/3
Face plate Ø 240 mm
Follow rest
Steady rest
Dead center MT 3
Dead center MT 5
Live center MT 3
Foot brake
Thread dial
Leadscrew hood
Turret protection
Chuck safeguard
Full length splash guard
TOAE quick change tool post
Working lamp LED
Quick locking tailstock carriage
Wagon gears in oil bath