


SQUARE COLUMN AND DOVETAIL GUIDES, TIMED REVERSING,  
TAPPING.

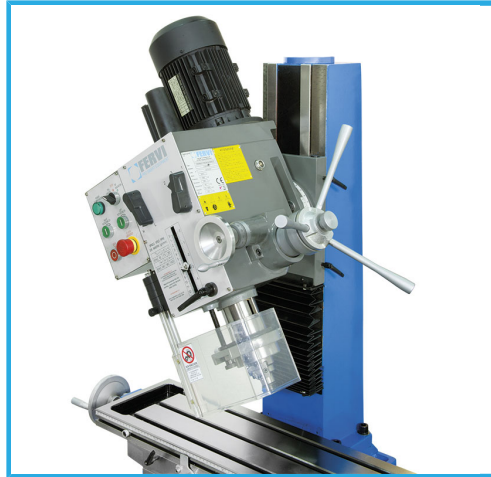

<b>Max drilling capacity on cast iron with pre-drilling hole</b>	∅ 40 mm
<b>Max drilling capacity on steel with pre-drilling hole(s235jr)</b>	∅ 45 mm
<b>Face milling cutter max</b>	∅ 80 mm
<b>End milling capacity</b>	∅ 32 mm
<b>Tapping capacity</b>	∅ 22 mm
<b>Spindle taper</b>	CM 4
<b>Chuck sizes</b>	1 - 13 mm B16
<b>Spindle speed</b>	(6) 95 - 1600 rpm
<b>Spindle travel</b>	120 mm
<b>Spindle rotation</b>	Dx - Sx
<b>Quill</b>	∅ 75 mm
<b>Head tilt left and right</b>	± 60°
<b>Manual vertical feed division</b>	0,02 mm
<b>Distance spindle axis - column surface</b>	240 mm
<b>Max distance spindle nose - table</b>	460 mm
<b>Table dimensions</b>	800 x 240 mm
<b>Slot</b>	14 mm
<b>Longitudinal axis</b>	560 mm
<b>Cross axis</b>	190 mm
<b>Base dimensions</b>	405 x 630 mm
<b>Motor</b>	230 V 50 Hz 1,5 kW
<b>Net weight</b>	300 kg
<b>Packaging dimensions</b>	850x760x1160 h mm

### Included

Chuck with key 1 - 16 B16  
Drill chuck shank MT 4 B16  
Spindle taper shank MT 4 ∅ 27 mm  
Reduction sleeve MT 4/3  
Reduction sleeve MT 3/2  
Oilers  
Tie rod M16  
Service keys

**Gross weight**

322,50 kg

**EAN Code**

8012667203542