


UTILIZZATE PRINCIPALMENTE NEI TORNİ CON Lâ€™OBBIETTIVO DI STABILIZZARE I PEZZI LUNGI E SOTTILI, PIÙ SOGGETTI ALLA FLESSIONE O..



€190,00

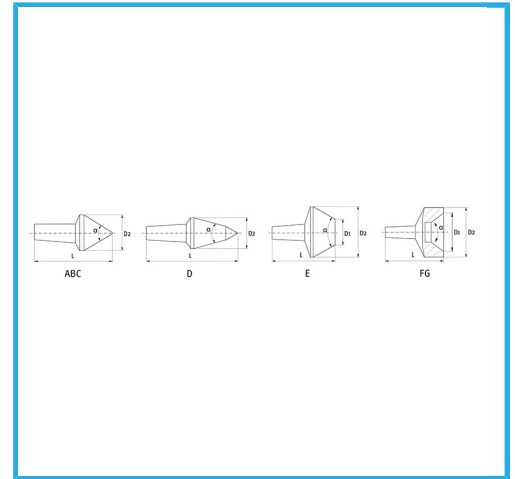

|                    |   |
|--------------------|---|
| <b>Cono morse</b>  | 2   |
| <b>A</b>           | L2 39 mm - D2-D3 16 mm - $\hat{I}\pm 60^\circ$ mm         |
| <b>B</b>           | L2 35,5 mm - D2-D3 16 mm - $\hat{I}\pm 75^\circ$ mm       |
| <b>C</b>           | L2 33 mm - D2-D3 16 mm - $\hat{I}\pm 90^\circ$ mm         |
| <b>D</b>           | L2 46 mm - D2-D3 16 mm - $\hat{I}\pm 60^\circ$ mm         |
| <b>E</b>           | L2 40 mm - D2-D3 25 mm / 10 mm - $\hat{I}\pm 60^\circ$ mm |
| <b>F</b>           | L2 36 mm - D2-D3 16 mm / 10 mm - $\hat{I}\pm 60^\circ$ mm |
| <b>G</b>           | L2 39 mm - D2-D3 20 mm / 16 mm - $\hat{I}\pm 60^\circ$ mm |
| <b>Max rpm</b>     | 5000 g/min  |
| <b>Portata max</b> | 45 kg   |
| <b>Peso lordo</b>  | 1,32 kg   |
| <b>Codice EAN</b>  | 8012667244682   |



Valigetta



Temprato



9 Pcs



Acciaio



Rettificato