


MAINLY USED IN LATHES WITH THE AIM OF STABILIZING LONG AND THIN PIECES, MORE SUBJECT TO BENDING OR UNCONTROLLED OSCILLATION...

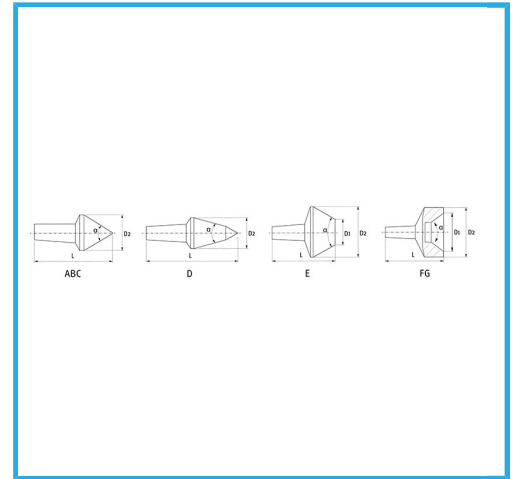

**Spindle taper**

<b>A</b>	3	L2 48 mm - D2-D3 20 mm - $\hat{I}\pm 60^\circ$ mm
<b>B</b>		L2 43,5 mm - D2-D3 20 mm - $\hat{I}\pm 75^\circ$ mm
<b>C</b>		L2 40,5 mm - D2-D3 20 mm - $\hat{I}\pm 90^\circ$ mm
<b>D</b>		L2 56 mm - D2-D3 18 mm - $\hat{I}\pm 60^\circ$ mm
<b>E</b>		L2 50 mm - D2-D3 35 mm / 15 mm - $\hat{I}\pm 60^\circ$ mm
<b>F</b>		L2 42 mm - D2-D3 22 mm / 18 mm - $\hat{I}\pm 60^\circ$ mm
<b>G</b>		L2 48 mm - D2-D3 35 mm / 30 mm - $\hat{I}\pm 60^\circ$ mm

**rpm max** 5000 g/min

**Maximum capacity** 150 kg

**Gross weight** 2,18 kg

**EAN Code** 8012667205201



Carrying case



Tempered



9 Pcs



Steel



Grounded