


HAUPTSÄCHLICH IN DREHMASCHINEN MIT DEM ZIEL VERWENDET,  
 LANGE UND DÜNNE TEILE ZU STABILISIEREN, DIE STÄRKEREN...

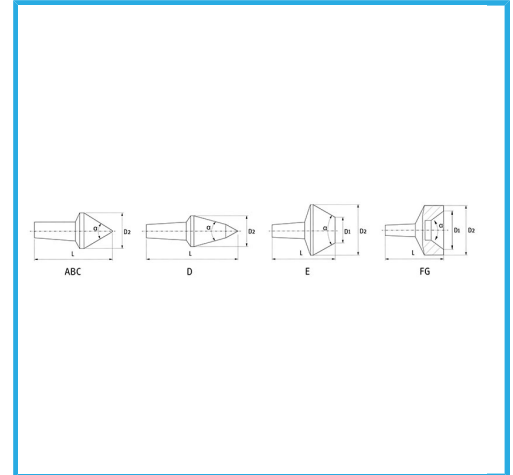

**konische Schraubstöcke**

	4
A	L2 61,5 mm - D2-D3 28 mm - $\hat{I} \pm 60^\circ$ mm
B	L2 55,5 mm - D2-D3 28 mm - $\hat{I} \pm 75^\circ$ mm
C	L2 51,5 mm - D2-D3 28 mm - $\hat{I} \pm 90^\circ$ mm
D	L2 69 mm - D2-D3 26 mm - $\hat{I} \pm 60^\circ$ mm
E	L2 61,5 mm - D2-D3 50 mm / 28 mm - $\hat{I} \pm 60^\circ$ mm
F	L2 55 mm - D2-D3 40 mm / 35 mm - $\hat{I} \pm 60^\circ$ mm
G	L2 60 mm - D2-D3 55 mm / 48 mm - $\hat{I} \pm 60^\circ$ mm

<b>max. Drehzahl</b>	5000 g/min
<b>max. Kapazität</b>	240 kg
<b>Bruttogewicht</b>	3,88 kg
<b>EAN-Code</b>	8012667011178



Koffer



Gehärteter



9 Pcs



Stahl



Korrigiert