



TO SLIGHTLY CORRECT THE AXIALITY AND DIAMETER OF THE HOLES.  
 IT CAN WORK AUTOMATICALLY AND MANUALLY.

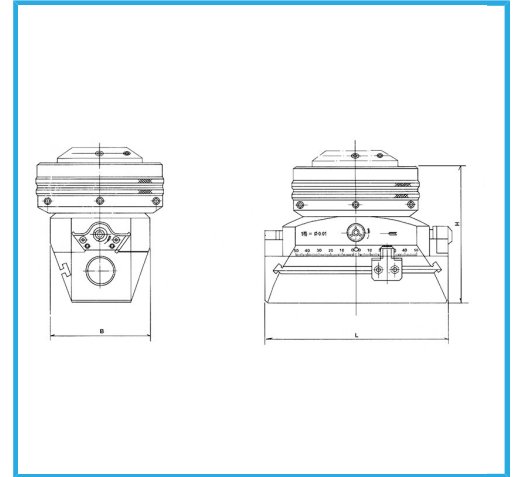

<b>Max facing and boring <math>\varnothing</math></b>	150 mm
<b>Max stroke of slide</b>	$\pm 15$ mm
<b>Fine feed per graduation</b>	0,005 mm
<b>Manual feed per revolution</b>	2 mm
<b>Self acting feed per revolution</b>	0,02-0,04-0,06 0,08-0,10-0,12 mm
<b><math>\varnothing</math> of tool post holes in head</b>	18 mm
<b>Max <math>\varnothing</math> of head</b>	90 mm
<b>Height of head without shank - (H)</b>	87,5 mm
<b>Weight of head without shank</b>	2,9 kg
<b>Length of sliding block</b>	75 (L) mm
<b>Width of sliding block</b>	70 (B) mm
<b>Collets hole</b>	4 - 8 - 12 $\varnothing$ mm
<b>Accessories</b>	1 - 2 - 6
<b>Extension hole for tool holder</b>	$\varnothing 6$ mm
<b>Shank</b>	CM3/MT3 - DIN 228A
<b>Gross weight</b>	7,46 kg
<b>EAN Code</b>	8012667196523

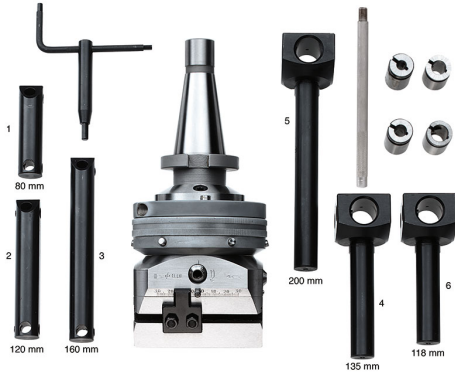

Box

40 Cr



Grounded