



3 AXIS READ OUT, SEMI NORTON GEAR BOX. TURNING BAR WITH ADJUSTABLE CLUTCH.

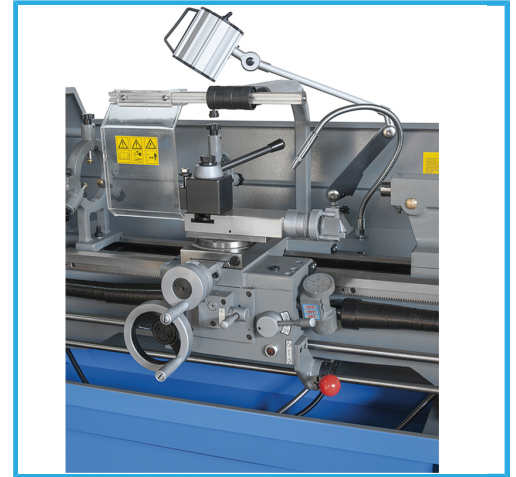

FERVIplus

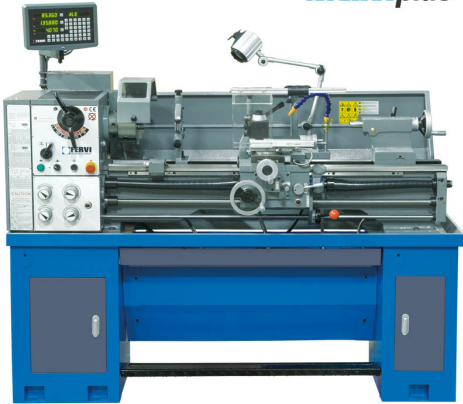

| | |
|---------------------------------------|------------------------|
| Centers height | 160 mm |
| Max swing over the bed | 320 mm |
| Max swing over the cross slide | 198 mm |
| Max swing over the gap | 470 mm |
| Tool height | 20 mm |
| Distance between centers | 1000 mm |
| Spindle bore | 51 mm |
| Spindle nose Camlock | Camlock D1-5 |
| Spindle bore taper MT | 5 |
| Spindle speed | (8) 70 - 2000 rpm |
| Longitudinal feeds | 0.052 - 1.392 mm/rev |
| Cross feeds | 0.009 - 0.253 mm/rev |
| Metric threads | 0,4 - 7 mm |
| Inch threads | 4 - 56 TPI |
| Tailstock taper MT | 3 |
| Motor | 400 V 50 Hz 1,5 kW |
| Dimensions | 1820 x 800 x 1320 h mm |
| Net weight | 630 kg |
| Packaging dimensions | 1930 x 760 x 1600 h mm |
| Gross weight | 630,00 kg |
| EAN Code | 8012667276355 |

Included

3+3 jaw self centering chuck Ø 200 mm
 4 Reversible independent jaws chuck Ø 200 mm
 Reduction sleeve MT 6/4
 Face plate Ø 320 mm
 Follow rest
 Steady rest
 Dead center MT 3
 Dead center MT 4
 Live center MT 3
 Foot brake
 Thread dial
 Leadscrew hood
 Turret protection
 Chuck safeguard
 Full length splash guard
 TOAE quick change tool post
 Working lamp
 Cooling system
 Clutch on turning bar
 Quick locking tailstock carriage
 Wagon gears in oil bath