
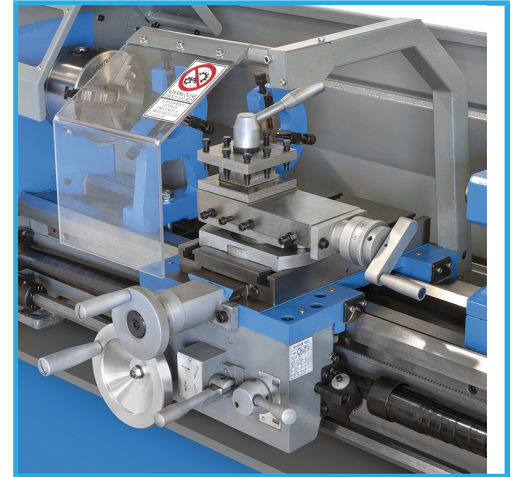


**BENCH LATHE SEMI NORTON GEAR BOX AND BELT SPEED, CHANGE, LONGITUDINAL AND CROSS FEEDS, TURNING, LEADSCREW, PARTIALLY ASSEMBLED...**

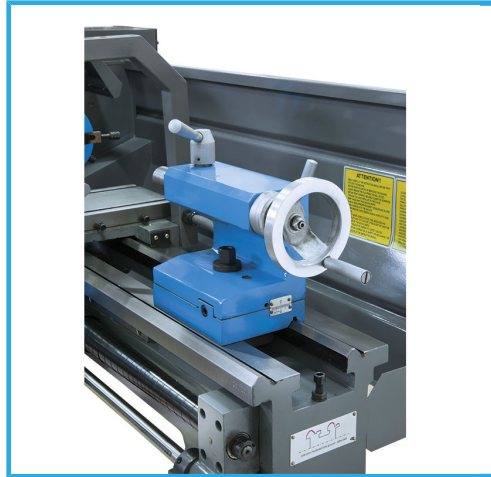

<b>Centers height</b>	150 mm
<b>Max swing over the bed</b>	290 mm
<b>Max swing over the cross slide</b>	180 mm
<b>Tool height</b>	12 mm
<b>Max length of workpiece</b>	700 mm
<b>Spindle bore</b>	26 mm
<b>Spindle bore taper MT</b>	4
<b>Spindle speed</b>	(6) 150 - 2000 rpm
<b>Longitudinal feeds</b>	0,085 - 0,832 mm / rev
<b>Cross feeds</b>	0,01 - 0,10 mm / rev
<b>Metric threads</b>	0,2 - 3,5 mm
<b>Inch threads</b>	8 - 48 TPI
<b>Tailstock taper MT</b>	2
<b>Motor</b>	230 V 50 Hz 1.1 kW
<b>Dimensions</b>	1270 x 610 x 1320 h mm
<b>Net weight</b>	270 kg
<b>Packaging dimensions</b>	1500x750x750 h mm   810x640x420 h mm
<b>Gross weight</b>	320,00 kg
<b>EAN Code</b>	8012667284053

**Included**

- 3+3 jaw self centering chuck Ø 125 mm
- 4 Reversible independent jaws chuck Ø 125 mm
- Face plate Ø 200 mm
- Flange for 4-jaw chuck Ø 125 mm
- Follow rest
- Steady rest
- Dead center MT 2
- Dead center MT 4
- Clutch on turning bar
- Thread dial
- Leadscrew hood
- Turret safeguard with micro switch
- Chuck safeguard
- Full length splash guard
- 4 side fix tool post 12 mm
- Quick stop tailstock with a swing of 85 mm
- Saddle gears in oil