


**BENCH LATHE SEMI NORTON GEAR BOX AND VARIABLE SPEED,
 LONGITUDINAL AND CROSS FEEDS, TURNING LEADSCREW, PARTIALLY
 ASSEMBLED BENCH...**

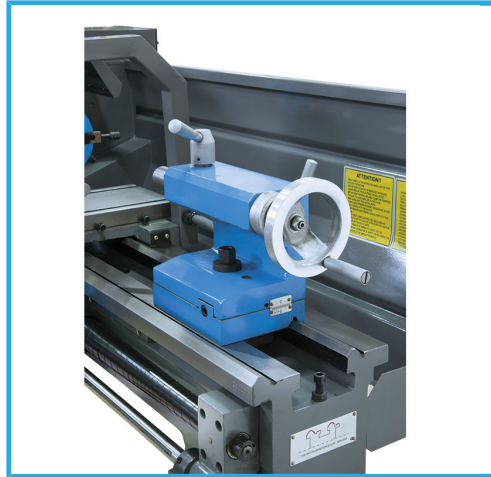

| | |
|---------------------------------------|--|
| Centers height | 145 mm |
| Max swing over the bed | 290 mm |
| Max swing over the cross slide | 150 mm |
| Tool height | 12 mm |
| Max length of workpiece | 700 mm |
| Spindle bore | 26 mm |
| Spindle bore taper MT | 4 |
| Variable spindle speed | 50 - 1000 rpm 110 - 2000 rpm |
| Longitudinal feeds | 0,07 - 0,65 mm/rev |
| Cross feeds | 0,03 - 0,12 mm/rev |
| Metric threads | 0,2 - 3,5 mm |
| Inch threads | 8 - 48 TPI |
| Tailstock taper MT | 2 |
| Motor | 230 V 50 Hz 1,5 kW |
| Dimensions | 1129 x 690 x 1127 mm |
| Net weight | 270 kg |
| Packaging dimensions | 1340x700x1065 h mm 800 x 630 x 400 h mm |
| Gross weight | 303,00 kg |
| EAN Code | 8012667284060 |

Included

- 3+3 jaw self centering chuck Ø 125 mm
- 4 Reversible independent jaws chuck Ø 125 mm
- Face plate Ø 200 mm
- Flange for 4-jaw chuck Ø 125 mm
- Follow rest
- Steady rest
- Dead center MT 2
- Dead center MT 4
- Clutch on turning bar
- Thread dial
- Leadscrew hood
- Turret safeguard with micro switch
- Chuck safeguard
- Full length splash guard
- 4 side fix tool post 12 mm
- Quick stop tailstock with a swing
- Saddle gears in oil